



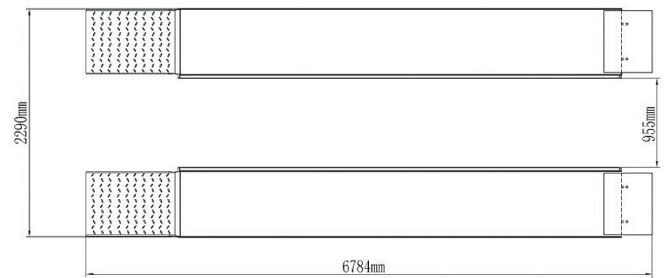

The Heavy-duty scissors lifts use four cylinders to support and each both cylinders are designed working synchronously.

FEATURES

- 2-dual synchronous cylinders are applied to assure the lifting level on both platforms
- Electro-air control system, safety self lock mechanism
- Sand resistance platform to avoid skidding
- Heavy duty design, the X serial scissors lifts use 150 x75mmtube to make it strong and assure the runways remain level during working
- Optional Jack

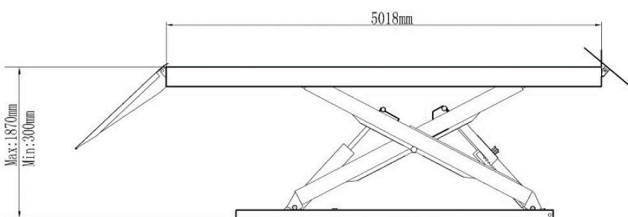

SPECIFICATIONS

| Model | Lifting Capacity | Lifting Time | A | | B | C | D | E | Gross Weight | Motor |
|-------|----------------------|--------------|----------------------|-------------------|-------------------|----------------------|---------------------|-----------------------------|-----------------------|-------|
| | | | Lifting Height | Minimum Height | Runway Length | Overall Width | Runway Width | Overall Length (Inc. Ramps) | | |
| TLX12 | 5.5T (12,000 lbs) | 65 Seconds | 1850 mm (72 7/8") | 245mm (9 5/8") | 5106 mm (201") | 2190 mm (86 1/4") | 625 mm (24 5/8") | 6583 mm (259 1/4") | 2058kg (4,528 lbs) | 4.0HP |