



// FEATURES

The TP10AS features our innovative super symmetric® (2 in 1) technology providing technicians the versatility to lift vehicles both symmetrically and asymmetrically upon demand.

With standard features that include adjustable height, direct drive, powder coat finish, stackable rubber pads and many other appealing features, the TP10AS accommodates the most demanding lift requirements.

Model: TP10AS


Super Symmetric 2-Post Lift

4,500 kg (10,000 lbs.) Lifting Capacity

// TP10AS

Super Symmetric

Technology

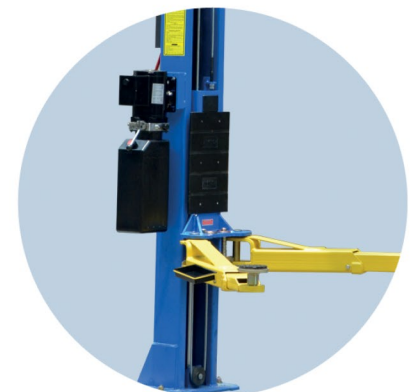



Super Symmetrical® Arms

// SPECIFICATIONS

Model	Style	Lifting Capacity	Lifting Time	A1	A2	B	C	D	E	Minimum Pad Height	Gross Weight	Motor
				Lifting Height	Lifting Height ll	Overall Height	Overall Width	Drive-Thru clearance	Width Between Columns			
TP10AS	Clearfloor Direct-driven	4.5T (10,000lbs)	52 Seconds	1720-1990 mm (67 3/4" - 78 3/8")	1900 - 2170 (75" - 85 1/2")	3621/3821 mm (142 1/2 - 150 1/2")	3428 mm (135")	24080 mm (97 5/8")	2850 mm (112 1/4")	105 mm (4 1/8")	670 Kg (1,500 lbs)	3HP/220V 50/60 HZ

// FEATURES & BENEFITS

- Supersymmetric (2 in 1) arms increase overall arm sweep and minimum arm reach to precisely lift vehicles:
 - Asymmetric or Symmetric lifting in the same service bay
 - Visually marked pick-up points on the vehicle.
 - Uni-body design vehicles
 - Wider and low profile vehicles
 - Both short and long wheel bases
- Dual hydraulic direct-driven cylinders made on ANSI standard
- Single-point safety release, allow technician to disengage both columns simultaneously
- Self-lubricating UHMW Polyethylene sliders and bronze bush
- Clear-floor design, provide unobstructed floor use
- Overhead safety shut-off device prevents vehicle damage
- Stackable rubber pads and 1.5", 3", 6" adapters as standard supply
- Standard adjustable heights accomodates varying ceiling heights
- Standard door guards
- Standard toe guards on lifting arms
- Optional adjustable widths accomodate varying service bay sizes
- Hydraulic power unit

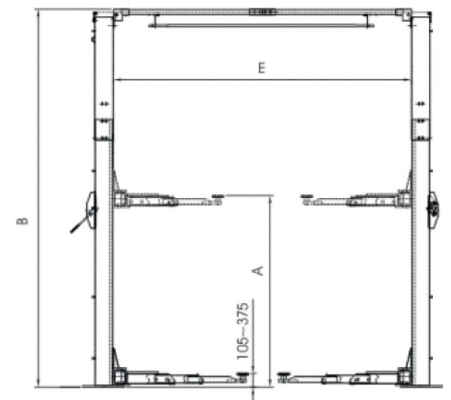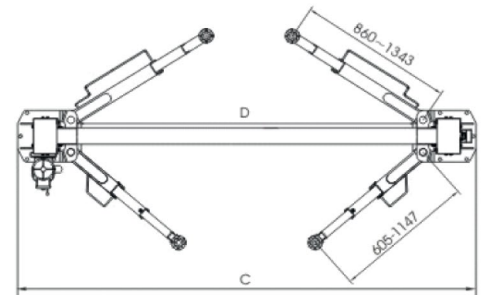

Single Point safety release makes easy for operator to unlock both columns locks from one column



Super symmetric arms allow you to load different vehicles in an asymmetric or symmetric configuration. Self-lubricating UHMW polyethylene sliders, Protect rubber door guards... Make INDYPRO more reliable



Dual hydraulic direct-driven cylinders



The Stackable rubber pads package with 1.5", 2.5", 5" extension adapters allow to adjust the Min. pads height according to different requirement.