

MODEL TX8F FLUSH-MOUNT SCISSORS LIFT




#FEATURES


- Electric/Hydraulic power system
- Dual synchronous cylinders are applied to assure the lifting level on both platforms
- Platforms are designed to be extended. It is suited for most of the car
- Automatic safety device. The safety release is operated by air cylinders
- Electro-air control cabinet
- Hydraulic equalization, No torsion bar need




Automatic Safety Device

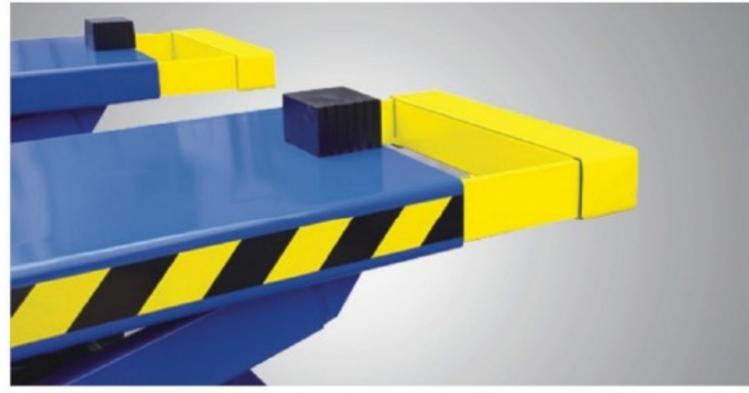

Extended Platforms

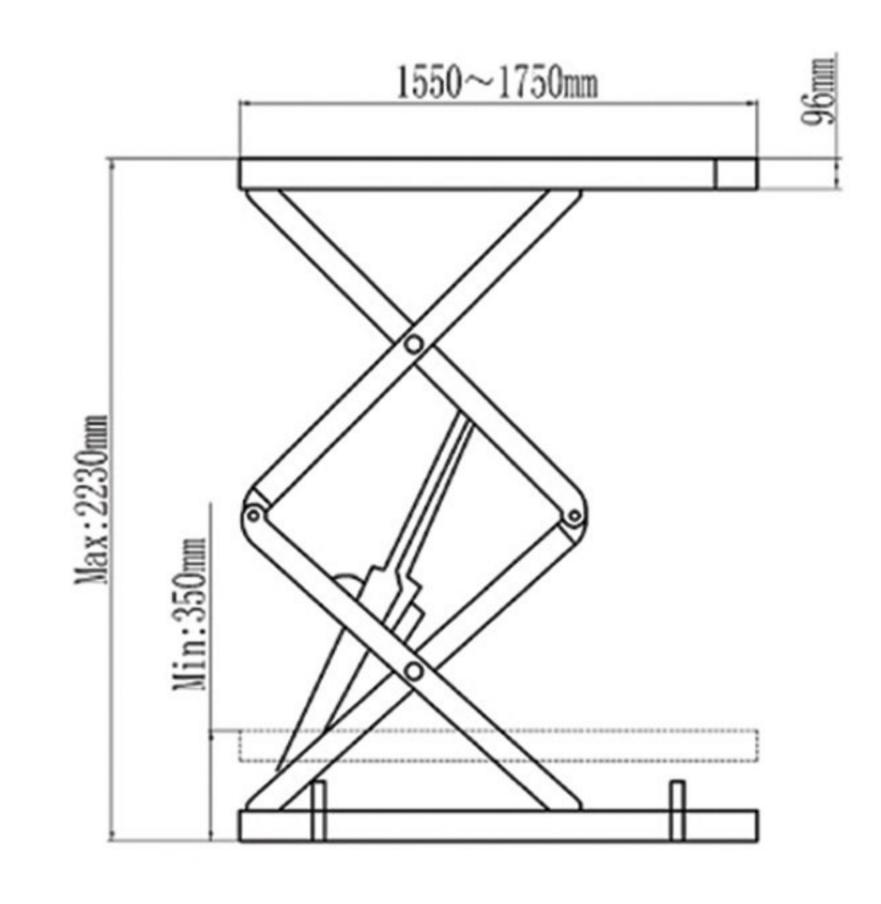

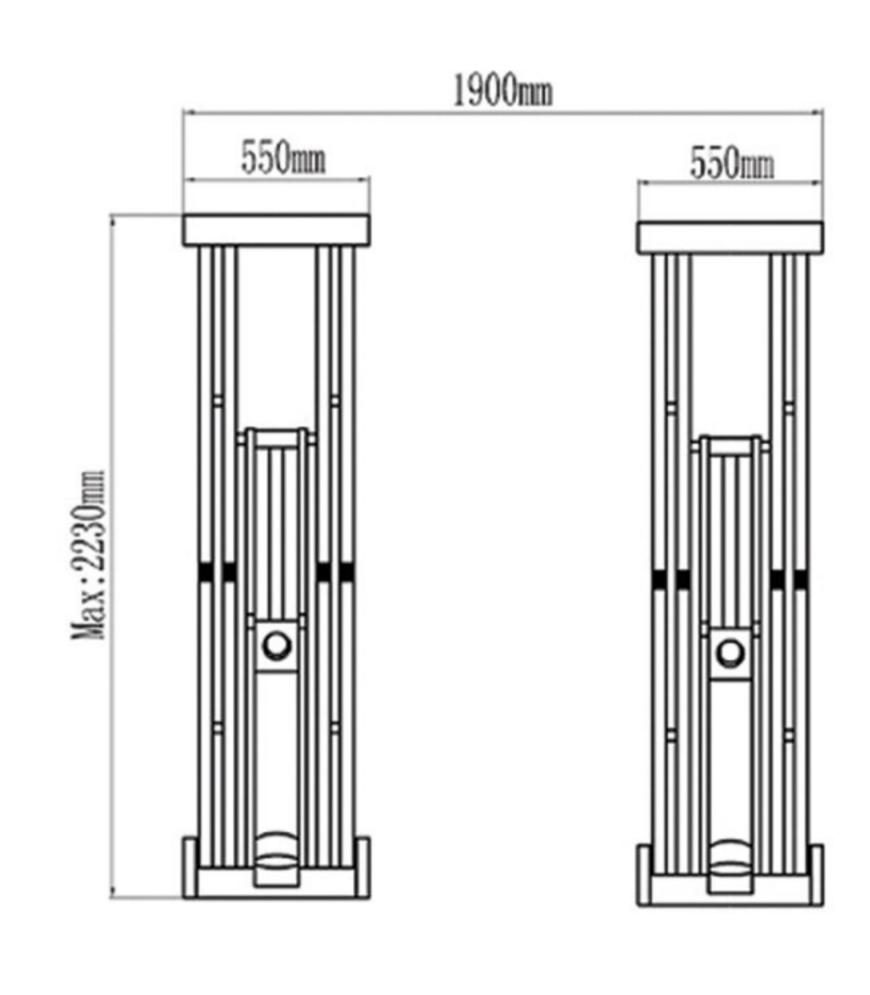

SPECIFICATIONS !

Model	Lifting Capacity	Lifting Time	Α		В	С	D		
			Lifting Height	Minimum Height	Overall Length	Width Between Runways	Runway Width	Gross Weight	Motor
TX8F	3.5T (8,000 lbs)	51 Seconds	2230 mm (87 3/4")	350mm (13 3/4")	1550-1750mm (61 - 68 7/8")	800 mm (31 1/2")	550 mm (21 5/8")	848kg (1,865 lbs)	2.0/3.0HP



